



OPERATING SPECIFICATIONS

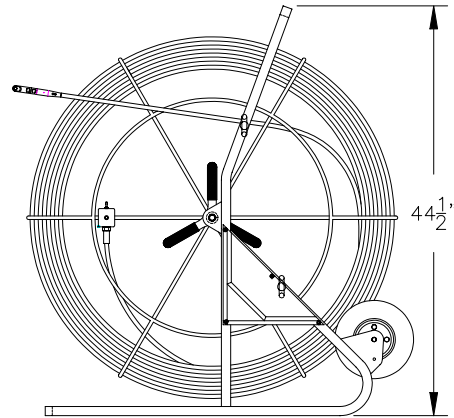

SERIES 56200 DETECTABLE RODDER

1. The detectable rodder is intended for tracing a conduit using a utility locator transmitter and receiver.

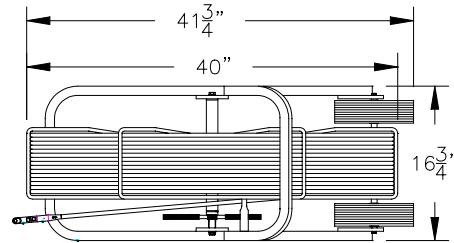

Part Number	Rod Length	Rod Diameter	Core Diameter	Min Bend Radius	Accessory Thread	Net Weight
56200-200	200 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	64 lb 29 kg
56200-400	400 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	74 lb 33 kg
56200-500	500 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	84 lb 38 kg
56200-600	600 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	94 lb 43 kg
56200-700	700 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	104 lb 47 kg
56200-800	800 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	114 lb 52 kg
56200-900	900 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	123 lb 56 kg
56200-1000	1000 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	144 lb 65 kg
56200-1500	1500 ft	0.440" 11 mm	0.300" 7.6 mm	16" 405 mm	3/8"-16	180 lb 82 kg

Dimensions and weights subject to change without notice.

For Standard Rodder units that do not include accessories, add "X" to the part number.